
Set Up Instructions

DLW-RT2050XL


Step 1: Open hard case and remove all aluminum frames and pole from foam inserts.



Step 2: Assemble the top and bottom of LED frames by pushing bungee corded sections together.

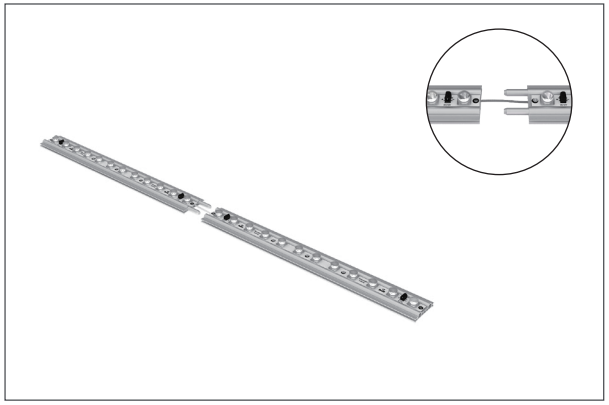


Step 3: Attach the rounded top frame. Add 2 bottom corners to the vertical LED frames. Note run power cord through holes in the bottom of the frame where they meet the corners.

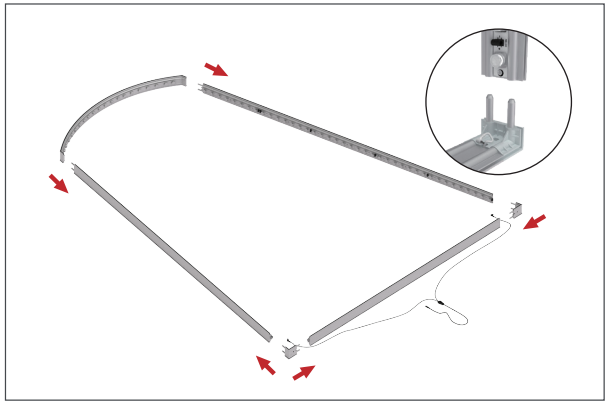


Step 4: Begin making the electrical connections for the main power cord at the bottom.



Step 5: Begin making the electrical connections between sections on the LED frames.

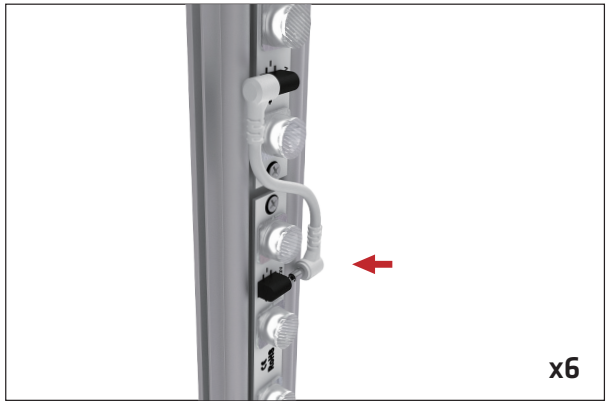


Step 6: To install a graphic start by inserting one eSEG™ Fabric Print into 4 corners of frame by pressing silicone into frame edge.
The fabric stretches on a diagonal and is easier to install by following Step 7.

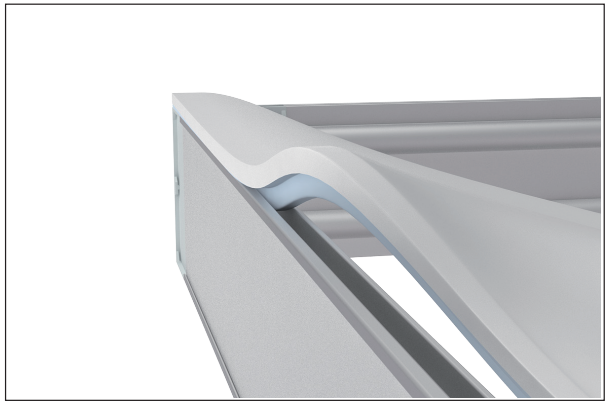


Set Up Instructions

DLW-RT2050XL


Step 7: Start in top corner (1) and then insert graphic into opposite bottom corner (2). Repeat on other side (3) and then (4). Then insert the graphic into center of each side and work back toward the corners.

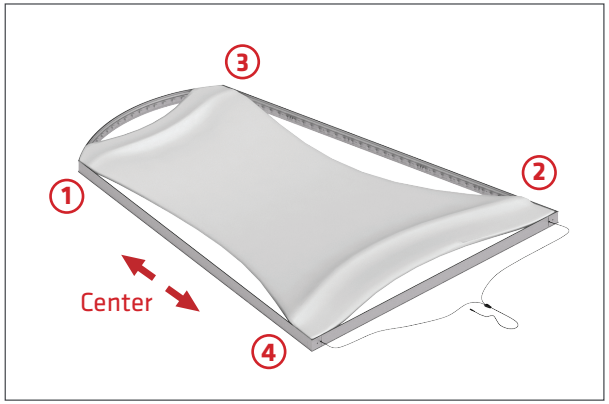

Step 8: Repeat Step 7 for the reverse side of frame.

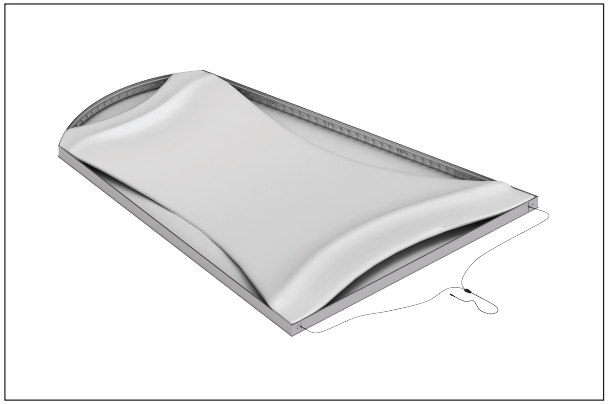

Step 9: Screw feet into 2 bottom corners using hex tool provided.

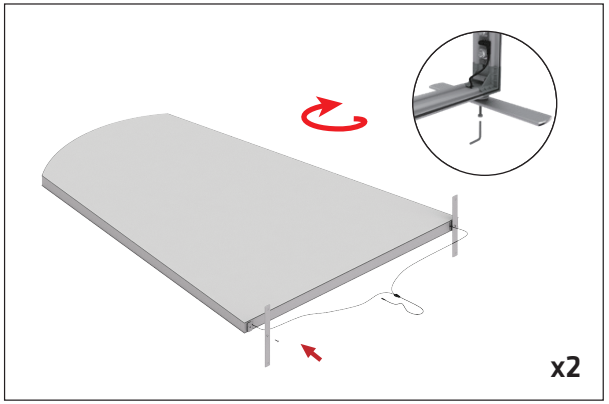

Step 10: Plug power cords from power supply into the bottom of frame. Stand display into the upright position.

